



Traffic Safety Corporation  
 2708 47th Ave.  
 Sacramento, CA 95822-3806  
 Toll Free: 888.446.9255  
 Tel: 916.394.9884  
 Fax: 916.394.2809  
 Email: sales@xwalk.com  
 Web: www.xwalk.com

## SafePace 625 Variable Messaging Radar Speed Sign

### General Description

The SafePace 625 speed sign displays driver speed and includes a "Slow Down" message that can be displayed to drivers who exceed the speed you choose.

Offering a compact, lightweight design and highly visible full size 15" led digits, the SafePace 625 is the ideal sign when you want to show drivers their speed with the added feature of programmable "Slow Down" messaging. Optional universal mounting and solar or battery power make the SafePace 625 a versatile option for portable, autonomous traffic calming.

### Features

- **Compact design** is 30% smaller than full size SafePace sign without compromising on features or visibility.
- Six inch LED **"Slow Down" messaging alerts drivers** who are exceeding the speed limit of your choice.
- Includes **two integrated flashing speed violator strobes** to further alert speeding drivers.
- Unique light enhancing, **anti glare lens system** provides brilliant visibility even in poor lighting conditions.
- Ultra **low power consumption** includes the most power-efficient radar technology available and optional solar power.
- **Optional battery power** allows for weeks of autonomous operation with normal usage.
- High strength aluminum sign face and individual optical lenses **protect against vandalism and theft.**
- **Stealth mode** allows the sign to collect baseline traffic data while speed display appears blank to motorists.



*Choice of faceplate colors available.  
 Full Size: 40"(h) x 30"(w) x 3.5"(d)  
 Compact: 28"(h) x 28"(w) x 3.5"(d)*

### SafePace 625 Specifications

Digit Size	15"
Weight	25 lb.
24/7, 365 Scheduling	√
Data Collection Compatibility*	√
Solar Compatibility*	√
Battery Operated Compatibility*	√
Universal Mounting Compatibility*	√
Cloud Compatibility*	√
Trailer Compatibility*	√
Dolly Compatibility*	√
Hitch Compatibility*	√
Warranty	2 Years

\* Optional feature.

### SafePace Sign Dolly

The SafePace sign dolly offers a compact, portable mounting solution for your SafePace sign.



### Features

- **Portable:** Control traffic in multiple locations by parking and locking the SafePace dolly wherever you need it.
- **Compatibility:** Use with the SafePace 100, 250, 450, 475, 550, 625, or 650 sign.
- **Universal Mounting Bracket:** Install and remove radar sign with the simple turn of a key.
- **Speed Limit Sign:** Available with adjustable speed limit sign to remind drivers of the speed they should be driving.
- **Solar Panel Option:** Available with optional solar power for improved energy efficiency.
- **One Year Warranty.**

### Specifications


- Height: 62", Width: 29.5", Depth: 35.5", Weight: 63 lb.
- Heavy duty 15" wheels.
- Powder coated black steel tube frame.

Visit our web site: [www.xwalk.com](http://www.xwalk.com)



**Traffic Safety Corporation**  
 2708 47th Ave.  
 Sacramento, CA 95822-3806  
 Toll Free: 888.446.9255  
 Tel: 916.394.9884  
 Fax: 916.394.2809  
 Email: sales@xwalk.com  
 Web: www.xwalk.com

## SafePace 625 Variable Messaging Radar Speed Sign

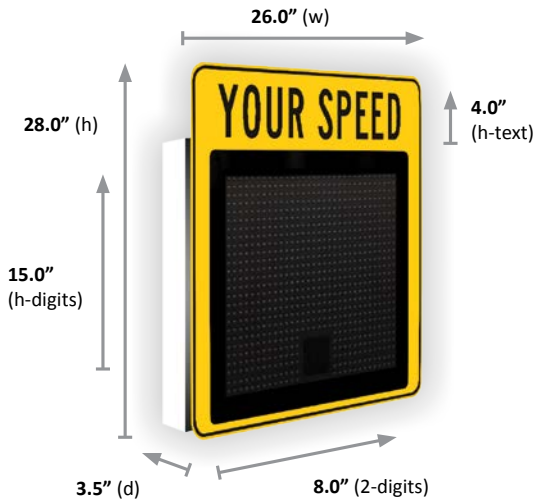

Feature	Specifications
Dimensions	
Digits	15"(h) x 8"(w), 744 LEDs
Message Matrix	15"(h) x 20.5"(w), 744 LEDs
Text	Full size: Letters 6.0"(h) spell "YOUR SPEED" fixed message, 2 lines Compact size: Letters 4.0" (h) spell "YOUR SPEED" fixed message, 1 line
Unit alone	21.5"(h) x 26"(w) x 3.5"(d)
Unit with "YOUR SPEED" sign mounted	Full size: 40.0"(h) x 30.0"(w) x 3.5"(d) Compact size: 28.0"(h) x 28.0"(w) x 3.5"(d)
Sign Weight (unit alone, without "YOUR SPEED" sign)	
AC Powered	24 lb.
4 cell battery powered model	24 lb. (not including batteries)
Solar powered model	24 lb. (not including solar panel or bracket)
General Specifications	
Operating Temperatures F (C):	-40° (-40°) to 185° (85°)
Speed Units	Miles per hour (mph) or Kilometers per hour (km/h)
Faceplate	Yellow or white high-Intensity prismatic reflective sheeting on sign face with black colored text. MUTCD approved colors and format

Feature	Specifications
Bashplate	Aluminum, 0.1875"
Communications	Bluetooth (standard) GSM/GPRS (optional, for use with SafePace Cloud)
Programming	SafePace Pro sign management software SafePace Cloud remote sign management 24/7 365 day unlimited programming and scheduling
Power Options (Electrical Specifications)	
AC power input	100~240 V AC
DC power input	12 V DC
Solar panel options	950W, 90W
Radar	
Internal	Doppler (FCC approved)
Radar RF out	5 mW maximum
Radar f-center	24.125 GHz +/- 25 MHz
Pickup distance	Up to 1,200 feet
Beam	11° x 11°, Linear polarization
Display	
LEDs	796
Digits	744 Amber, 15°, 5 mm, luminous Intensity (5,000 – 12,000 mcd/LED)
Speed Violator Strobe	52 White, 15°, 5 mm, luminous intensity (18,000 – 28,000 mcd/LED)
Optical Lenses	796
Ambient Light Sensors	2 sensors and automatic brightness control
Enclosure	
Construction	12/14 gauge aluminum, flat black powder coated front for reduced glare and maximum contrast; light gray powder coated body to minimize heat absorption
Weatherproof Rating	Weatherproof, NEMA 4X-12, IP65 level compliant Non-sealed and ventilated
Warranty	
Sign	2 years
Batteries	1 year

**Visit our web site: [www.xwalk.com](http://www.xwalk.com)**