



Traffic Safety Corporation  
 2708 47th Ave.  
 Sacramento, CA 95822-3806  
 Toll Free: 888.446.9255  
 Tel: 916.394.9884  
 Fax: 916.394.2809  
 Email: sales@xwalk.com  
 Web: www.xwalk.com


## SafePace 700 Variable Messaging Radar Speed Sign

### General Description

The SafePace 700 variable messaging sign offers variable messaging with extra large 18" LED digits. The SafePace 700 variable messaging sign allows you to display the message of your choice while displaying vehicle speeds in bright, large digits that can be seen even from a distance. With fully customizable text and graphics, the SafePace 700 is ideal for a variety of road conditions and situations.

### Features

- **MUTCD compliant** full matrix radar sign with two rows of customizable text and 18" digits
- Message displayed can be determined by driver speed
- Allows for **animated text or graphics** such as moving arrows or a scrolling message
- Unique light enhancing, anti-glare lens system provides **brilliant visibility** even in poor lighting
- Includes **integrated flashing speed violator strobe** to alert speeding drivers
- **Ultra low power consumption** including the most power-efficient radar technology available and optional solar power
- **Superior construction** and durability for long-lasting performance
- High strength aluminum sign face and individual **optical lenses to protect against vandalism or theft**
- **Stealth Mode** allows the sign to collect baseline traffic data while speed display appears blank to motorists

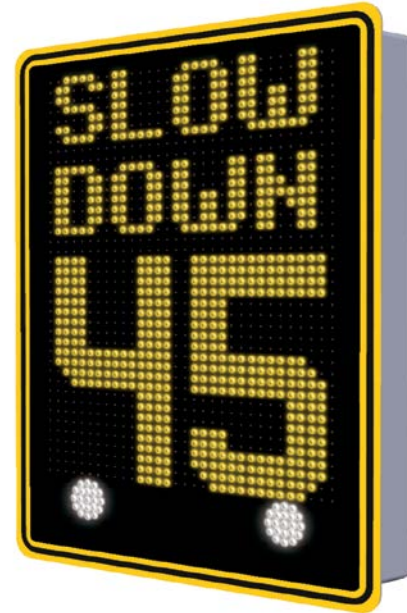

*Choice of faceplate colors available.*

### SafePace 700 Specifications

Digit Size	18"
Height	42.5"
Weight	55 lb.
24/7, 365 Scheduling	√
Data Collection	√
Solar Compatibility	√
Battery Operated	
Universal Mounting	
Cloud Compatibility	√
Trailer Compatibility	√
Dolly Compatibility	
Hitch Compatibility	
Warranty	2 Years

Visit our web site: [www.xwalk.com](http://www.xwalk.com)




**Traffic Safety Corporation**  
 2708 47th Ave.  
 Sacramento, CA 95822-3806  
 Toll Free: 888.446.9255  
 Tel: 916.394.9884  
 Fax: 916.394.2809  
 Email: sales@xwalk.com  
 Web: www.xwalk.com

## SafePace 700 Variable Messaging Radar Speed Sign

Feature	Specifications
<b>Dimensions</b>	
Digits	18" (h) x 10" (w), 768 LEDs
Variable Message Matrix	12.5" (h) x 24" (w), 512 LEDs, 1 graphic or 2 lines of 6.0" (h) text (up to 7 characters per line)
Unit	42.5" (h) x 31.0" (w) x 5.0" (d)
<b>Sign Weight</b>	
Unit Alone Without Batteries	55 lb.
<b>General Specifications</b>	
Operating Temperatures F° (C°)	-40° (-40°) to 185° (85°)
Speed Units	Miles per hour (mph) or kilometers per hour (km/h)
Faceplate	Yellow or white high-intensity prismatic reflective sheeting on sign face with black colored text. MUTCD approved colors and format.
Bashplate	Aluminum, 0.1875"
Communications	Bluetooth (standard), GSM/GPRS (optional, for use with SafePace Cloud)
Programming	SafePace Pro sign management software, SafePace Cloud remote sign management, 24/7 365 day unlimited programming and scheduling
<b>Power Options (Electrical Specifications)</b>	
AC Power Input	100~240 V AC
DC Power Input	12 V DC
Solar Panel Options	140 W
<b>Radar</b>	
Internal	Doppler (FCC approved)
Radar RF Out	5 mW maximum
Radar F-center	24.125 GHz +/- 25 MHz
Pickup Distance	Up to 1,200 feet
Beam	11° x 11°, linear polarization

Feature	Specifications
<b>Display</b>	
LEDs	1,322
Digits	768 Amber, 15°, 5 mm, luminous intensity (5,000 – 12,000 mcd/LED)
Matrix	512 Amber, 15°, 5 mm, luminous intensity (5,000 – 12,000 mcd/LED)
Speed Violator Strobe	42 White, 15°, 5 mm, luminous intensity (18,000 – 28,000 mcd/LED)
Optical Lenses	1,322
Ambient Light Sensors	2 sensors and automatic brightness control
<b>Enclosure</b>	
Construction	12/14 gauge aluminum, flat black powder coated front for reduced glare and maximum contrast; light gray powder coated body to minimize heat absorption
Weatherproof Rating	Weatherproof, NEMA 4X-12, IP65 level compliant. Non-sealed and ventilated.
<b>Warranty</b>	
Sign	2 years
Batteries	1 year

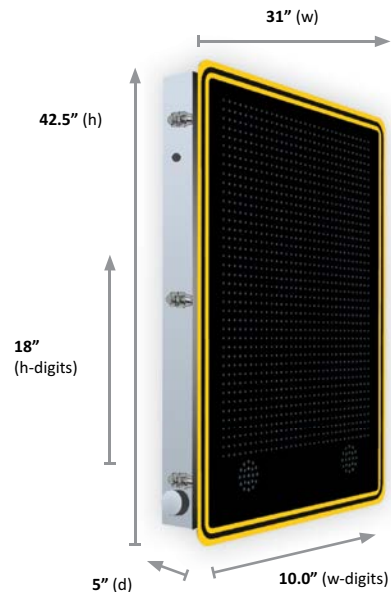

**Visit our web site: [www.xwalk.com](http://www.xwalk.com)**