



Traffic Safety Corporation  
2708 47th Ave.  
Sacramento, CA 95822-3806  
Toll Free: 888.446.9255  
Tel: 916.394.9884  
Fax: 916.394.2809  
Email: sales@xwalk.com  
Web: www.xwalk.com

## SafePace 250 Driver Feedback Radar Speed Sign


### General Description

The SafePace 250 driver feedback sign is a compact speed display sign. With slightly larger digits than the entry level SafePace 100, but still smaller than the full size 15" digits on larger SafePace signs, the SafePace 250 offers a versatile solution for those looking for a slightly larger sign.

The compact, portable SafePace 250 can be mounted at multiple locations and offers exceptional visibility and power efficiency.

### Features

- **MUTCD Compliant**
- **Enlarged Sign Digits:** The bestselling compact SafePace sign is now available with slightly larger digits for improved visibility.
- **Energy Efficient:** The SafePace 250 can function for up to 3 weeks autonomously with optional battery power depending on traffic volume.
- **Optimal Visibility:** Unique light enhancing, anti-glare lens system, as well as automatic ambient light adjustment, provide brilliant visibility even in poor lighting conditions.
- **User Friendly:** Software interface is user friendly and can be programmed to set sign parameters quickly and easily. Optional data collection allows you to download traffic data and generate statistical reports from anywhere with SafePace Cloud.
- **Stealth Mode:** Baseline traffic data can be collected for comparison and analysis while speed display appears blank to motorists.
- **Speed Violator Strobe:** Programmable flashing strobe alerts drivers to slow down when they exceed the threshold speed you choose.
- **Universal Mounting:** Optional mounting brackets let you use one sign at multiple locations with the turn of a key.

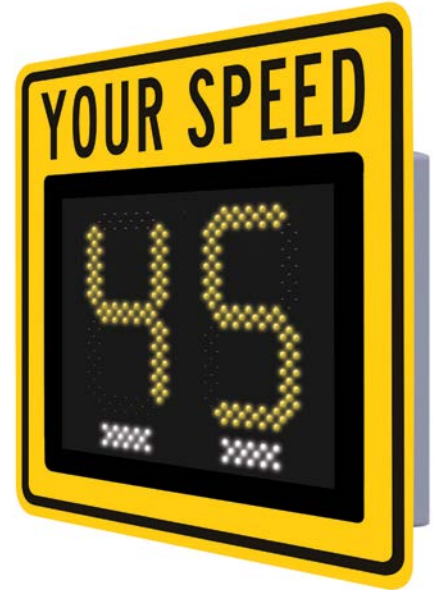

*Choice of faceplate colors available.*

### SafePace 250 Specifications

Digit Size	12"
Height	28"
Weight	22 lb.
24/7, 365 Scheduling	√
Data Collection	√
Solar Compatibility	√
Battery Operated	√
Universal Mounting	√
Cloud Compatibility	√
Trailer Compatibility	√
Dolly Compatibility	√
Hitch Compatibility	√
Warranty	2 Years

Visit our web site: [www.xwalk.com](http://www.xwalk.com)




**Traffic Safety Corporation**  
 2708 47th Ave.  
 Sacramento, CA 95822-3806  
 Toll Free: 888.446.9255  
 Tel: 916.394.9884  
 Fax: 916.394.2809  
 Email: sales@xwalk.com  
 Web: www.xwalk.com

## SafePace 250 Driver Feedback Radar Speed Sign

Feature	Specifications
<b>Dimensions</b>	
Digits	12"(h) x 6.4"(w), 112 LEDs per digit
Text	Letters 4.0" (h) spell "YOUR SPEED" fixed message, 1 line
Unit Alone	21.5"(h) x 26"(w) x 3.5"(d)
Unit with "YOUR SPEED" Sign Mounted	Full size sign: 28.0"(h) x 28.0"(w) x 3.5"(d)
<b>Sign Weight (unit alone, without "YOUR SPEED" sign)</b>	
AC Powered	18 lb.
4 Cell Battery Powered Model	22 lb.
Solar Powered Model	20 lb. (not including solar panel or bracket)
<b>General Specifications</b>	
Operating Temperatures F° (C°)	-40° (-40°) to 185° (85°)
Speed Units	Miles per hour (mph) or kilometers per hour (km/h)
Faceplate	Yellow or white high-intensity prismatic reflective sheeting on sign face with black colored text. MUTCD approved colors and format.
Bashplate	Aluminum, 0.25"
Communications	Bluetooth (standard), GSM/GPRS (optional, for use with SafePace Cloud)
Programming	SafePace Pro sign management software, SafePace Cloud remote sign management, 24/7 365 day unlimited programming and scheduling
<b>Power Options (Electrical Specifications)</b>	
AC Power Input	100~240 V AC
DC Power Input	12 V DC
Solar Panel Options	50W, 90W
<b>Radar</b>	
Internal	Doppler (FCC approved)
Radar RF Out	5 mW maximum
Radar F-center	24.125 GHz +/- 25 MHz

Feature	Specifications
Pickup Distance	Up to 1,200 feet
Beam	11° x 11°, linear polarization
<b>Display</b>	
LEDs	252
Digits	224 Amber, 23°, 5 mm, luminous intensity (5,000 – 12,000 mcd/LED)
Speed Violator Strobes	28 White, 15°, 5 mm, luminous intensity (18,000 – 28,000 mcd/LED)
Optical Lenses	252
Ambient Light Sensors	1 sensor and automatic brightness control
<b>Enclosure</b>	
Construction	12 gauge aluminum, flat black powder coated front for reduced glare and maximum contrast; light gray powder coated body to minimize heat absorption
Weatherproof Rating	Weatherproof, NEMA 4X-12, IP65 level compliant. Non-sealed and ventilated.
<b>Warranty</b>	
Sign	2 years
Batteries	1 year

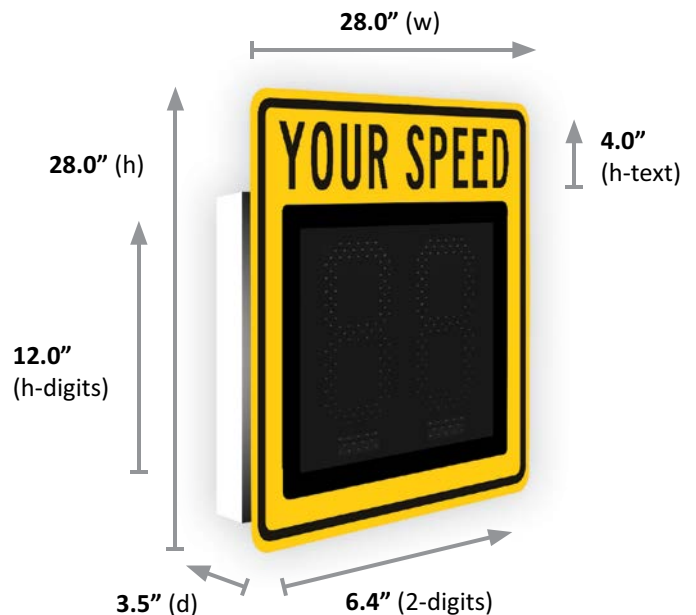

**Visit our web site: [www.xwalk.com](http://www.xwalk.com)**