



Traffic Safety Corporation
 2708 47th Ave.
 Sacramento, CA 95822-3806
 Toll Free: 888.446.9255
 Tel: 916.394.9884
 Fax: 916.394.2809
 Email: sales@xwalk.com
 Web: www.xwalk.com

SafePace 625 Variable Messaging Radar Speed Sign

General Description

The SafePace 625 speed sign displays driver speed and includes a “Slow Down” message that can be displayed to drivers who exceed the speed you choose. Offering a compact, lightweight design and highly visible full size 15" led digits, the SafePace 625 is the ideal sign when you want to show drivers their speed with the added feature of programmable slow down messaging. Optional universal mounting and solar or battery power make the SafePace 625 a versatile option for portable, autonomous traffic calming.

Features

- Compact design is **30% smaller** than full size SafePace sign without compromising on features or visibility
- Six inch LED **Slow Down** messaging alerts drivers who are exceeding the speed limit of your choice
- Includes two **integrated flashing speed violator strobes** to further alert speeding drivers
- Unique light enhancing, anti-glare lens system provides **brilliant visibility** even in poor lighting conditions
- **Ultra low power consumption** includes the most power-efficient radar technology available and optional solar power
- Optional battery power allows for **weeks of autonomous operation** with normal usage
- High strength aluminum sign face and individual optical lenses **protect against vandalism and theft**
- **Stealth mode** allows the sign to collect baseline traffic data while speed display appears blank to motorists



Choice of faceplate colors available.

SafePace 625 Specifications

Digit Size	15"
Height	28"
Weight	24 lb.
24/7, 365 Scheduling	√
Data Collection	√
Solar Compatibility	√
Battery Operated	√
Universal Mounting	√
Cloud Compatibility	√
Trailer Compatibility	√
Dolly Compatibility	√
Hitch Compatibility	√
Warranty	2 Years

Visit our web site: www.xwalk.com




Traffic Safety Corporation
 2708 47th Ave.
 Sacramento, CA 95822-3806
 Toll Free: 888.446.9255
 Tel: 916.394.9884
 Fax: 916.394.2809
 Email: sales@xwalk.com
 Web: www.xwalk.com

SafePace 625 Variable Messaging Radar Speed Sign

Feature	Specifications
Dimensions	
Digits	15"(h) x 8"(w), 744 LEDs
Message Matrix	15"(h) x 20.5"(w), 744 LEDs
Text	Full size: Letters 6.0"(h) spell "YOUR SPEED" fixed message, 2 lines; Compact size: Letters 4.0"(h) spell "YOUR SPEED" fixed message, 1 line
Unit Alone	21.5"(h) x 26"(w) x 3.5"(d)
Unit with "YOUR SPEED" Sign Mounted	Full size: 40.0"(h) x 30.0"(w) x 3.5"(d); Compact size: 28.0"(h) x 28.0"(w) x 3.5"(d)
Sign Weight (unit alone, without "YOUR SPEED" sign)	
AC Powered	24 lb.
4 Cell Battery Powered Model	24 lb. (not including batteries)
Solar Powered Model	24 lb. (not including solar panel or bracket)
General Specifications	
Operating Temperatures F° (C°)	-40° (-40°) to 185° (85°)
Speed Units	Miles per hour (mph) or kilometers per hour (km/h)
Faceplate	Yellow or white high-intensity prismatic reflective sheeting on sign face with black colored text. MUTCD approved colors and format.
Bashplate	Aluminum, 0.1875"
Communications	Bluetooth (standard), GSM/GPRS (optional, for use with SafePace Cloud)
Programming	SafePace Pro sign management software, SafePace Cloud remote sign management, 24/7 365 day unlimited programming and scheduling
Power Options (Electrical Specifications)	
AC Power Input	100~240 V AC
DC Power Input	12 V DC
Solar Panel Options	950W, 90W

Feature	Specifications
Radar	
Internal	Doppler (FCC approved)
Radar RF Out	5 mW maximum
Radar F-center	24.125 GHz +/- 25 MHz
Pickup Distance	Up to 1,200 feet
Beam	11° x 11°, linear polarization
Display	
LEDs	796
Digits	744 Amber, 15°, 5 mm, luminous intensity (5,000 – 12,000 mcd/LED)
Speed Violator Strobe	52 White, 15°, 5 mm, luminous intensity (18,000 – 28,000 mcd/LED)
Optical Lenses	796
Ambient Light Sensors	2 sensors and automatic brightness control
Enclosure	
Construction	12/14 gauge aluminum, flat black powder coated front for reduced glare and maximum contrast; light gray powder coated body to minimize heat absorption
Weatherproof Rating	Weatherproof, NEMA 4X-12, IP65 level compliant. Non-sealed and ventilated.
Warranty	
Sign	2 years
Batteries	1 year

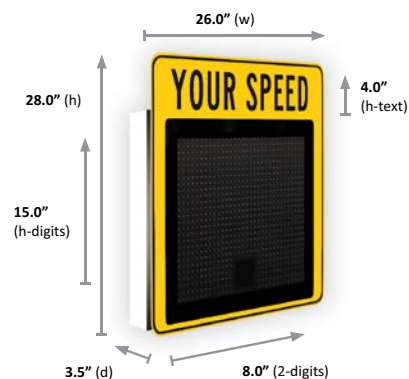

Visit our web site: www.xwalk.com