



Traffic Safety Corporation
2708 47th Ave.
Sacramento, CA 95822-3806
Toll Free: 888.446.9255
Tel: 916.394.9884
Fax: 916.394.2809
Email: sales@xwalk.com
Web: www.xwalk.com

SafePace 600 Variable Messaging Radar Speed Sign

General Description

The SafePace 600 variable messaging sign is a versatile and full featured radar speed solution. Whether you want to simply alert drivers of their speeds or notify them about an event, construction or dangerous road conditions, the SafePace 600 variable messaging sign will provide years of continued traffic calming, making our streets a safer place for years to come.

Features

- **MUTCD compliant** full matrix radar sign with two rows of **customizable text** and 15" digits
- Message displayed can be determined by driver speed
- Allows for **animated text or graphics** such as moving arrows or a scrolling message
- Unique light enhancing, anti-glare lens system provides **brilliant visibility** even in poor lighting
- Includes **integrated flashing speed violator strobe** to alert speeding drivers
- **Ultra low power consumption** including the most power-efficient radar technology available and optional solar power
- **Superior construction** and durability for long-lasting performance
- High strength aluminum sign face and individual optical lenses to **protect against vandalism or theft**
- **Stealth Mode** allows the sign to collect baseline traffic data while speed display appears blank to motorists



Choice of faceplate colors available.

SafePace 600 Specifications

Digit Size	15"
Height	42.5"
Weight	55 lb.
24/7, 365 Scheduling	√
Data Collection	√
Solar Compatibility	√
Battery Operated	
Universal Mounting	
Cloud Compatibility	√
Trailer Compatibility	√
Dolly Compatibility	
Hitch Compatibility	
Warranty	2 Years

Visit our web site: www.xwalk.com




Traffic Safety Corporation
 2708 47th Ave.
 Sacramento, CA 95822-3806
 Toll Free: 888.446.9255
 Tel: 916.394.9884
 Fax: 916.394.2809
 Email: sales@xwalk.com
 Web: www.xwalk.com

SafePace 600 Variable Messaging Radar Speed Sign

Feature	Specifications
Dimensions	
Digits	15" (h) x 8" (w), 112 LEDs per digit
Variable Message Matrix	12.5" (h) x 24" (w), 512 LEDs; 1 graphic or 2 lines of 6.0" (h) text (up to 7 characters per line)
Unit	42.5" (h) x 31.0" (w) x 5.0" (d)
Sign Weight	
Unit Alone Without Batteries	55 lb.
General Specifications	
Operating Temperatures F° (C°)	-40° (-40°) to 185° (85°)
Speed Units	Miles per hour (mph) or kilometers per hour (km/h)
Faceplate	Yellow or white high-intensity prismatic reflective sheeting on sign face with black colored text. MUTCD approved colors and format.
Bashplate	Aluminum, 0.1875"
Communications	Bluetooth (standard), GSM/GPRS (optional, for use with SafePace Cloud)
Programming	SafePace Pro sign management software, SafePace Cloud remote sign management, 24/7 365 day unlimited programming and scheduling
Power Options (Electrical Specifications)	
AC Power Input	100~240 V AC
DC Power Input	12 V DC
Solar Panel Options	90 W, 140 W
Radar	
Internal	Doppler (FCC approved)
Radar RF Out	5 mW maximum
Radar F-center	24.125 GHz +/- 25 MHz
Pickup Distance	Up to 1,200 feet
Beam	11° x 11°, linear polarization

Feature	Specifications
Display	
LEDs	757
Digits	224 Amber, 23°, 5 mm, luminous intensity (5,000 – 12,000 mcd/LED)
Matrix	512 Amber, 15°, 5 mm, luminous intensity (5,000 – 12,000 mcd/LED)
Speed Violator Strobe	21 White, 15°, 5 mm, luminous intensity (18,000 – 28,000 mcd/LED)
Optical Lenses	757
Ambient Light Sensors	2 sensors and automatic brightness control
Enclosure	
Construction	12/14 gauge aluminum, flat black powder coated front for reduced glare and maximum contrast; light gray powder coated body to minimize heat absorption
Weatherproof Rating	Weatherproof, NEMA 4X-12, IP65 level compliant. Non-sealed and ventilated.
Warranty	
Sign	2 years
Batteries	1 year

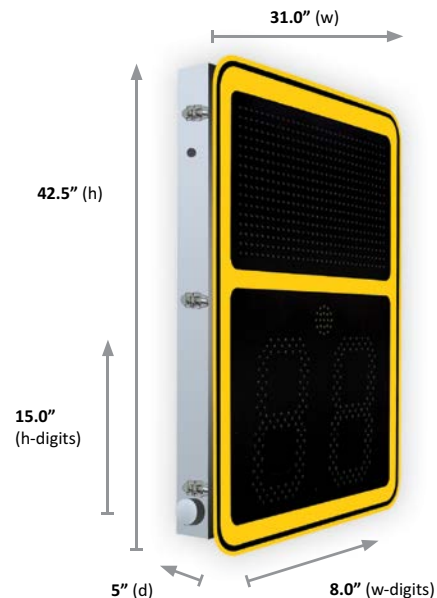

Visit our web site: www.xwalk.com