

SafePace Evolution 12

Driver Feedback Radar Speed Sign

General Description

The SafePace Evolution 12 is a compact, portable sign with 12" digits that meet MUTCD standards. Offering speed activated digit color changes, as well as the ability to display up to 3 digits, the SafePace Evolution 12 is a small sign with big impact.

Features

- **1 Year SafePace Cloud Included:** Control your signs, access data, generate statistical reports and manage sign parameters, such as threshold speeds and violator strobe, with remote access via SafePace Cloud.
- **MUTCD compliant** with static "YOUR SPEED" message and 12" digits.
- **3-Digit, Dual-Color Display:** LED digit color can be programmed to change from yellow to red based on driver speed.
- **Speed Violator Strobe:** Programmable flashing strobe alerts drivers to slow down when they exceed the threshold speed you choose.
- **Energy Efficient:** Includes the most power-efficient radar technology available.
- **Optimal Visibility:** Unique light enhancing, anti-glare lens system, as well as automatic ambient light adjustment, provide brilliant visibility even in poor lighting conditions.
- **User-Friendly Software Interface:** Sign can be programmed quickly and easily.
- **Stealth Mode:** Baseline traffic data can be collected for comparison and analysis while speed display appears blank to motorists.
- **Universal Mounting:** Optional mounting brackets let you use one sign at multiple locations with the turn of a key.
- **Superior construction** and durability for long-lasting performance.



Choice of faceplate colors available.



SafePace Cloud Remote Access

We include 1 year of SafePace Cloud with all Evolution radar signs. SafePace Cloud allows you to remotely access and manage your signs from anywhere, anytime.

- View real time sign data.
- Access all sign stats from one location.
- Download traffic data and reports.
- Set up customized alerts.
- Change settings and parameters.
- Cut down on workforce hours.




EV 12 Specifications

Digit Size	12"
Height	29"
Weight	20 lb.
24/7, 365 Scheduling	√
Data Collection	√
Solar Compatibility	√
Battery Operated	√
Universal Mounting	√
Cloud Compatibility	√
Trailer Compatibility	√
Dolly Compatibility	√
Hitch Compatibility	√
Warranty	2 Years

+1.888.446.9255 US & Canada
 +1.916.394.9884 Worldwide
 +1.916.394.2809 Fax

www.xwalk.com
 sales@xwalk.com

Traffic Safety Corp., 2708 47th Ave.
 Sacramento, CA, 95822, USA

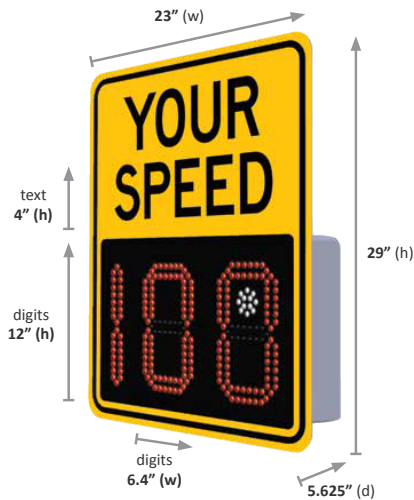

Feature	Specifications
Dimensions	
Digits	<ul style="list-style-type: none"> - First digit: 12"(h) x 1.125"(w), 64 LEDs (3-digit signs only) - Other digits: 12"(h) x 6.4"(w), 224 LEDs per digit
Unit with "YOUR SPEED" sign mounted	Full size sign: 29.0"(h) x 23.0"(w) x 5.625"(d)
Sign Weight (includes "YOUR SPEED" sign (2 lb.) mounted)	
AC Powered	20 lb.
Battery Powered	20 lb. (not including batteries)
Solar Powered	20 lb. (not including batteries, solar panel or bracket)
General Specifications	
Operating Temp. F° (C°)	-40° (-40°) to 185° (85°)
3-Digit Speed Display	<ul style="list-style-type: none"> - Miles per hour (mph) 3-99. - Kilometers per hour (km/h) 5-160.
Faceplate	High-Intensity prismatic reflective sheeting on "YOUR SPEED" signs with black colored text. MUTCD approved colors and format.
Communications	Bluetooth (standard). GSM/GPRS (optional, for use with SafeSpace Cloud)
Programming	SafeSpace Pro sign management software, SafeSpace Cloud remote sign management, 24/7 365 day unlimited programming and scheduling.

Feature	Specifications
Power Options (Electrical Specifications)	
AC Power Input	100~240 V AC
DC Power Input	12 V DC
Solar Panel Options	50W solar panel
Radar	
Internal	Doppler (FCC approved)
Model	DF 600
Radar RF Out	5 mW maximum
Radar F-center	24.125 GHz or 24.200 GHz
Pickup Distance	Up to 400 feet
Beam Angle	24° (vertical) x 12° (horizontal)
Beam Polarization	Linear
CE Mark (Radar)	Yes
Display	
LEDs	524
Digits (Yellow)	<ul style="list-style-type: none"> - 256 LEDs - Color: Yellow (590 nm) - Viewing Angle at 50% IV: 30° - Partial Flux (Brightness): 9000 - 22400 Ev,[lux]/LED
Digits (Red)	<ul style="list-style-type: none"> - 256 LEDs - Color: Red (633 nm) - Viewing Angle at 50% IV: 30° - Partial Flux (Brightness): 7100 - 18000 Ev,[lux]/LED
Speed Violator Strobes	<ul style="list-style-type: none"> - 12 LEDs - Color: White (2700 K - 6500 K) - Viewing angle at 50% IV: 150° - Luminous Flux: typically 33lm @ 4000 K - Luminous Efficacy: typically 176 lm/W @4000 K
Ambient Light Sensors	1 sensor and automatic brightness adjustment
Enclosure	
Construction	Vandal resistant, lightweight polymer. Matte black front for reduced glare and maximum contrast. Light gray body to minimize heat absorption.
Weatherproof Rating	Weatherproof, NEMA 4X-12, IP65 level compliant. Non-sealed and ventilated.
Warranty	
Sign	2 years
Batteries	1 year