



SafePace Evolution 15SD Driver Feedback Radar Speed Sign

General Description

The SafePace 15SD driver feedback sign is a portable, lightweight radar sign with large 15" digits. The sign includes a speed activated "Slow Down" message that is flashed at speeding drivers. The sign's digits are dual color and the "Slow Down" messaging is available in a choice of red or yellow. The 15SD's Universal Mounting Bracket allows the sign to be mounted at multiple locations.

Features

- **1 Year SafePace Cloud Included:** Control your signs, access data, generate statistical reports and manage sign parameters, such as threshold speeds and violator strobe, with remote access via SafePace Cloud.
- **MUTCD compliant** with static "YOUR SPEED" message and highly visible 15" LED digits that are visible from up to 600 feet away.
- **3-Digit, Dual-Color Display:** LED digit color can be programmed to change from yellow to red based on driver speed.
- **Slow Down Messaging:** Sign flashes "Slow Down" message at drivers who exceed designated speed.
- **Speed Violator Strobes:** Programmable flashing strobes alert drivers to slow down when they exceed the threshold speed you choose.
- **Energy Efficient:** Includes the most power-efficient radar technology available. Optional solar power allows the sign to function autonomously for up to five weeks.
- **Optimal Visibility:** Unique light enhancing, anti-glare lens system, as well as automatic ambient light adjustment, provide brilliant visibility even in poor lighting conditions.
- **User-Friendly Software Interface:** Sign can be programmed quickly and easily.
- **Stealth Mode:** Baseline traffic data can be collected for comparison and analysis while speed display appears blank to motorists.
- **Universal Mounting Bracket Included:** Allows you to use one sign at multiple locations with the turn of a key.
- **Superior construction** and durability for long-lasting performance.



Choice of faceplate colors available.



SafePace Cloud Remote Access

We include 1 year of SafePace Cloud with all Evolution radar signs. SafePace Cloud allows you to remotely access and manage your signs from anywhere, anytime.

- View real time sign data.
- Access all sign stats from one location.
- Download traffic data and reports.
- Set up customized alerts.
- Change settings and parameters.
- Cut down on workforce hours.




EV 15SD Specifications

Digit Size	15"
Height	42"
Weight	28 lb.
24/7, 365 Scheduling	√
Data Collection	√
Solar Compatibility	√
Universal Mounting	√
Cloud Compatibility	√
Trailer Compatibility	√
Dolly Compatibility	√
Hitch Compatibility	√
Warranty	2 Years

+1.888.446.9255 US & Canada
+1.916.394.9884 Worldwide
+1.916.394.2809 Fax

www.xwalk.com
sales@xwalk.com

Traffic Safety Corp., 2708 47th Ave.
Sacramento, CA, 95822, USA

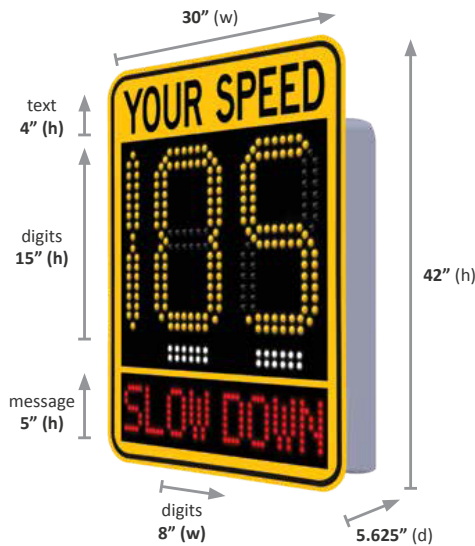

Feature	Specifications
Dimensions	
Digits	- First digit: 15" (h) x 1.5" (w) - Other digits: 15" (h) x 8" (w)
LED Message Text Letters	5" (h) spell "SLOW DOWN", 1 line
Unit with "YOUR SPEED" sign mounted	Full size sign: 42" (h) x 30" (w) x 5.625" (d)
Sign Weight (includes "YOUR SPEED" sign (2 lb.) mounted)	
AC Powered	28 lb.
Solar Powered	28 lb. (not including batteries, solar panel or bracket)
General Specifications	
Operating Temp. F° (C°)	-40° (-40°) to 185° (85°)
3-Digit Speed Display	- Miles per hour (mph) 3-99. - Kilometers per hour (km/h) 5-160.
Faceplate	High-Intensity prismatic reflective sheeting on "YOUR SPEED" signs with black colored text. MUTCD approved colors and format.
Communications	Bluetooth (standard). GSM/GPRS (optional, for use with SafePace Cloud)
Programming	SafePace Pro sign management software, SafePace Cloud remote sign management, 24/7 365 day unlimited programming and scheduling.

Feature	Specifications
Power Options (Electrical Specifications)	
AC Power Input	100~240 V AC
Solar Panel Options	50W or 90W solar panel
Radar	
Internal	Doppler (FCC approved)
Model	DF 300
Radar RF Out	5 mW maximum
Radar F-center	24.125 GHz center +/- 25 MHz
Pickup Distance	Up to 1,200 feet
Beam Angle	24° (vertical) x 12° (horizontal)
Beam Polarization	Linear
CE Mark (Radar)	Yes
Display	
LEDs	775
Speed Digits (Yellow)	- 256 LEDs - Color: Yellow (590 nm) - Viewing Angle at 50% IV: 30° - Partial Flux (Brightness): 9000 - 22400 Ev, _[lux] /LED
Speed Digits (Red)	- 256 LEDs - Color: Red (633 nm) - Viewing Angle at 50% IV: 30° - Partial Flux (Brightness): 7100 - 18000 Ev, _[lux] /LED
Slow Down Message (Red)	- 227 LEDs - Color: Red (633 nm) - Viewing Angle at 50% IV: 30° - Partial Flux (Brightness): 7100 - 18000 Ev, _[lux] /LED
Speed Violator Strobes	- 36 LEDs - Color: White (2700 K - 6500 K) - Viewing angle at 50% IV: 150° - Luminous Flux: typically 33lm @ 4000 K - Luminous Efficacy: typically 176 lm/W @4000 K
Ambient Light Sensor	1 sensor and automatic brightness adjustment
Enclosure	
Construction	Vandal resistant, lightweight polymer. Matte black front for reduced glare and maximum contrast. Light gray body to minimize heat absorption.
Weatherproof Rating	Weatherproof, NEMA 4X-12, IP65 level compliant. Non-sealed and ventilated.
Warranty	
Sign	2 years
Batteries	1 year

+1.888.446.9255 US & Canada
 +1.916.394.9884 Worldwide
 +1.916.394.2809 Fax

www.xwalk.com
 sales@xwalk.com

Traffic Safety Corp., 2708 47th Ave.
 Sacramento, CA, 95822, USA