

Toll Free: 888.446.9255
Tel: 916.394.9884
Fax: 916.394.2809
Web: www.xwalk.com



Traffic Safety Corporation
2708 47th Ave.
Sacramento, CA 95822-3806
U.S.A.

Changeable Message Display Trailer Mounted

"GET THE MESSAGE ACROSS"

MODEL MB8249


FEATURES

- Graphic Capability
- Compact Trailer Design
- Quick Message Selection
- Removable Tongue
- Lockable Cabinets
- Password Protection
- Powder Coat Paint
- Tongue Jack (with wheel)
- NTCIP Controller Standard
- Independent Module Operation
- Photocell for Auto dimming
- RF Immunity

GRAPHIC CAPABILITY




- MUTCD Symbols
- Arrow Board Patterns

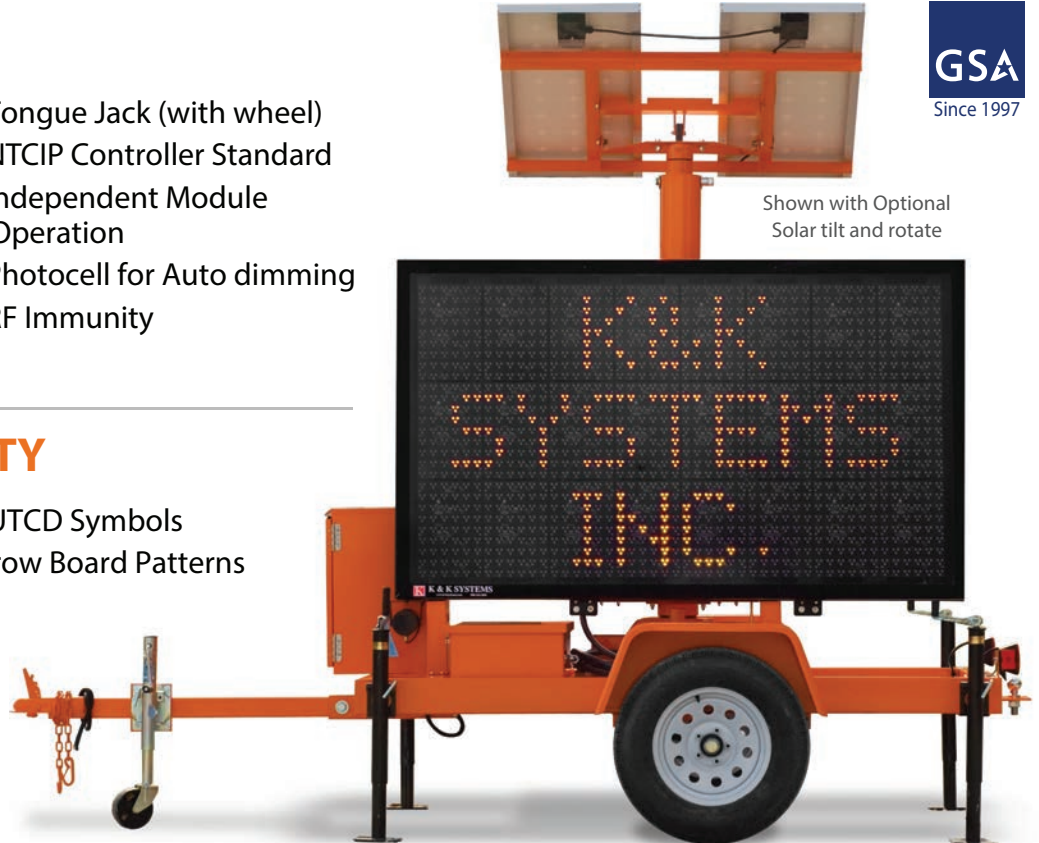

Shown with Optional
Solar tilt and rotate

Quick Selection Switch

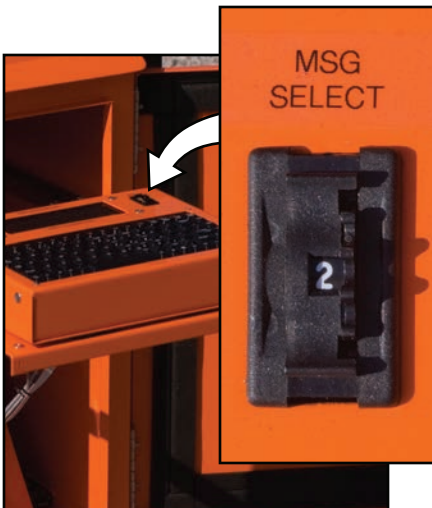

Quick Message Selection Switch

you are able to switch between the first 16 user defined messages that you have created. This will allow for field workers to have no experience in programming - just turn the thumbwheel to desired message number.

Optional Solar Feature

The Solar **rotate and tilt feature** increases energy output 3 to 1 - compared to traditional flat solar panels.

Rotate 360 degrees independent of sign.

Able to tilt at a 45 degree angle.



Toll Free: 888.446.9255
Tel: 916.394.9884
Fax: 916.394.2809
Web: www.xwalk.com



Traffic Safety Corporation
2708 47th Ave.
Sacramento, CA 95822-3806
U.S.A.

General Specifications for Model MB8249

Solar Powered, Portable Changeable Message Sign. Capable of three lines of alphanumeric 10" high text and graphics/animations, all LED display, self contained on-board computer, multiple alphanumeric fonts, powder coat paint system, and display is 82" x 49", with hydraulic style trailer. Supports up to 260 predefined messages (text and graphics). Supports storage of up to 100 changeable messages. System comes standard with six-(6) 6-volt batteries (totaling 675 12V amps) and 160 watts of solar. NTCIP Compliant.

Trailer

Width: 68"
Length with tongue: 148"
Length without tongue: 99"
Transport Height: 97"
Salt Spray: 1,000 hours
Paint: Powder Coat
Main frame: 3"x5"x1/8"
Front/Rear Cross members: 3"x3"x1/8"
Wheels: 15"
Axle: 3500lbs leaf spring
Fenders: 16 gauge bolt on
Jacks: (4) adjustable corner jacks & tongue jack with wheel.
Hitch: 2" ball

Display Modules

Pixel Matrix: 27x48 Pixel Arrangement
LED Module: Each is 6x9 matrix
LED's Per Pixel: 3
LED Type: Agilent amber 592NM
Viewing Angle: 30 degrees
Visibility: 4800 feet
Hours: 100,000 hour LED
Lines: Displays 3 lines of text and also displays **Graphics**
Characters per line: 8 (12 characters optional)
Character Height: 10"
***If one module fails the remainder of board is unaffected.**

Options

Locking lug nuts
Cell Modem
Radar
Pintle ring or bulldog hitch
Electric or hydraulic brakes
Custom Paint
Other Options available

Display Enclosure

Construction: Extruded Aluminum 6063 alloy
Length: 82" **Width:** 49" **Depth:** 6"
Paint: Powder coat paint
Salt Spray: 1000 hours
UV Resistant: 500 hours
Seal: Weather resistant
Venting: Vented top and bottom
Front face: 1/8" Lexan UV matte finish
Raising and lowering of display: Electro-hydraulic
Secondary raise and lowering: Manual hand pump

Power and Charging

Batteries: (6) 6 volt 225 amp batteries
Battery Charger: 110 Volt, 1000 watt, 60amp
Recharge: 24 hours
Onboard diagnostics to monitor: Solar, battery, and load
Reliability: 30 days without sunlight
Solar: (2) 80 watt Solar panels
Regulator: 30 amp regulator with low voltage & high voltage disconnect.

Controller

Preprogrammed Messages: 260 also includes arrow and MUTCD symbols
User programmable: 100
Message Timing: Slow, medium, fast
Dimming: Auto or Manual
Protection: Password
Quick Message Selection: Thumbwheel to quickly select between 16 user programmable messages.
Controller Display: LCD
Data Entry: Mini Keyboard
Memory: Non volatile
***Pre-wired to accommodate radar, cell modem, and PC**
****"Auto Resume" after power failure**